

A CSW Industrials Company

Outset Seal

Adjustable Lineset Outlet






HVAC Piping Wall Penetrations



Sealing the wall penetration created by HVAC refrigeration lines helps prevent air leakage, moisture leading to mold growth, and rodent and insect intrusion.

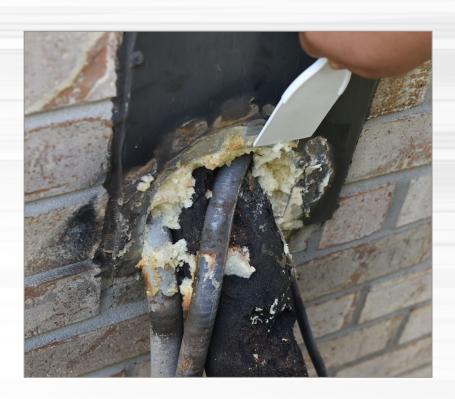





Why Outset Seal?







Innovative design protects against weather elements, air leakage, rodent intrusion, and comes with a **3-year warranty.**



Outset Seal's **unique hinge style closure** makes installation quick and easy. 1 SKU to stock!



Adjustable. Works with mini-split and central HVAC systems. Suitable for new and existing installs.





UV and weather resistant, durable

Blocks rodent intrusion

Innovative
flexible sleeve
design reduces
piping vibration
which can cause
damage

Prevents moisture and mold growth

Prevents air leakage







Combining Outset Seal and K-Flex Titan Insulation meets, or helps meet, code requirements.

Outset Seal

K-Flex Titan Insulation



Constructed with ASTM standard approved materials. No testing criteria exists but helps meet the purpose of the codes.



Meets outdoor exposure code requirements of the 2012/2015 IECC Residential & Commercial codes



RectorSeal recommends consulting with a professional to **ensure installation meets local codes!**





Outset Seal's **unique hinge style closure** makes installation quick and easy for new and existing installations.



No need to cut existing linesets!







1 SKU, suitable for new installations and retrofit projects!



Works with both mini-split and central systems

Adjustable sleeve fits up to 7/8" OD line set with 3/4" insulation

Installs on multiple surfaces

Brick | Concrete | Masonry | Siding | Metal Paneling | Stone | Stucco | Drywall

Why Outset Seal?







Innovative design protects against weather elements, air leakage, rodent intrusion, and comes with a **3-year warranty.**



Outset Seal's **unique hinge style closure** makes installation quick and easy. 1 SKU to stock!



Adjustable. Works with mini-split and central HVAC systems. Suitable for new and existing installs.

Outset Seal



Features

Outset Seal seals penetrations for both central HVAC and mini-split systems. It resists mold growth, deters rodents and insects and is UV resistant. Outset Seal's hinged design allows for easy installation and removal from the wall opening.

Application

Adjustable wall seal for central HVAC and mini split systems. 12" x 12" panel size fits up to 7/8" OD line set with 3/4" Insulation. Suitable for new installation and retrofit projects.



Code	Description	Qty
84006	Adjustable Lineset Outlet	4

K-Flex Insulation Solutions



K-Flex Titan



K-Flex Insulation Tapes



Closed-cell, flexible, elastomeric foam insulation with a flexible co-extruded UV resistant jacketing

- 1 step install no field applied protective coating or jacketing required
- Meets outdoor exposure requirements of the 2012/2015 IECC Residential & Commercial codes

Code	Description	Qty
83032	120 ft. Roll, 5/8" x 1/2"	1
83033	75 ft. Roll, 5/8" x 3/4"	1
83034	75 ft. Roll, 3/4" x 1/2"	1
83035	60 ft. Roll, 3/4" x 3/4"	1
83036	60 ft. Roll, 7/8" x 1/2"	1
83037	50 ft. Roll, 7/8" x 3/4"	1

Cork Tape – Self-adhesive insulation tape

- Flexible
- Fits all diameter pipes, fittings and connections
- Rubber-based mastic material

Foam Tape – Thermal performance for HVAC/R Applications

- Flexible
- Long-lasting bond
- Environmentally friendly
- Protects against mold, fungal and bacterial growth

Code	Description	Qty
83040	Cork Tape 2" x 1/8" x 30'	12
83041	Foam Tape 2" x 1/8" x 30'	12

10 © RectorSeal 2023

Silicone Sealant

Seals between Outset Seal and wall penetration



Features

- -50° to +450°F service temp
- Insulates, bonds, and seals between Outset Seal and wall penetration
- Vibration resistant
- Remains Flexible

Application

General Purpose Silicone Sealant can be used to seal around bathtubs, shower stalls, bathroom vanities, kitchen counters, sinks, windows and doors. It can be used for replacing ceramic tiles and making new gaskets for dishwasher doors, sealing windshields in cars, vans and boats. Use it to repair or install body/side molding, and any application that requires a permanently flexible waterproof seal that will withstand moisture, heat and vibration.

Code	Description	Qty
57505	10.3 Fl. Oz. Tube - White	12
57506	10.3 Fl. Oz. Tube - Clear	12



